

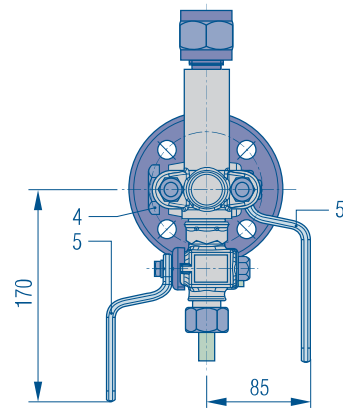
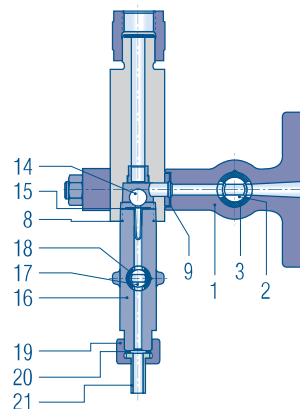




Shut-off fittings

Gauge cocks

DA *Nominal pressure: PN 160*
PN 160 *Construction to KLINGER*
material code FS/H
Shut-off fitting for:
Gauges T 85

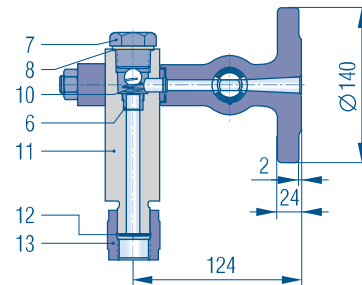

| Pos. | Part | Materials |
|------|----------------------|-------------|
| | | FS/H |
| 1 | Gauge cock body | A 105 |
| 2 | Cock plug AB 18 | AISI 316 |
| 3 | Packing sleeve AB 18 | Graphite |
| 4 | Tightening nut | A 105 |
| 5 | Handle | Fe37B-Nylon |
| 6 | Seat bush | 1.4104 |
| 7 | Plug | A 105 N |
| 8 | Gasket | Soft nickel |
| 9 | Gasket | K-SIL |
| 10 | Pressure spring | A 301 |
| 11 | Connecting piece | C22.8 |
| 12 | Gasket | Soft nickel |
| 13 | Tighting nut | 9SMn28K |
| 14 | Ball | A 301 |
| 15 | Pressure spring | A 301 |
| 16 | Drain cock body | A 105 |
| 17 | Plug AB 12 | A 316 |
| 18 | Packing sleeve AB 12 | Graphite |
| 19 | Union nut | A 105 |
| 20 | Gasket | K-SIL |
| 21 | End tube | A 105 |

Connection gauge body – gauge cock

The connection to the gauge is formed by conjunction with a connecting nut. The type ABL 12 drain cock is screwed into the lower connecting piece. The connecting pieces are fitted with safety balls as standard.

Set of DA connecting pieces, in conjunction with set of DA gauge cocks for gauge types T 85.